


ACOUSTICAL TREATMENT

2100 SERIES - ACOUSTICAL PANELS
PREFABRICATED - FABRIC OR PERFORATED VINYL

CORFLEX

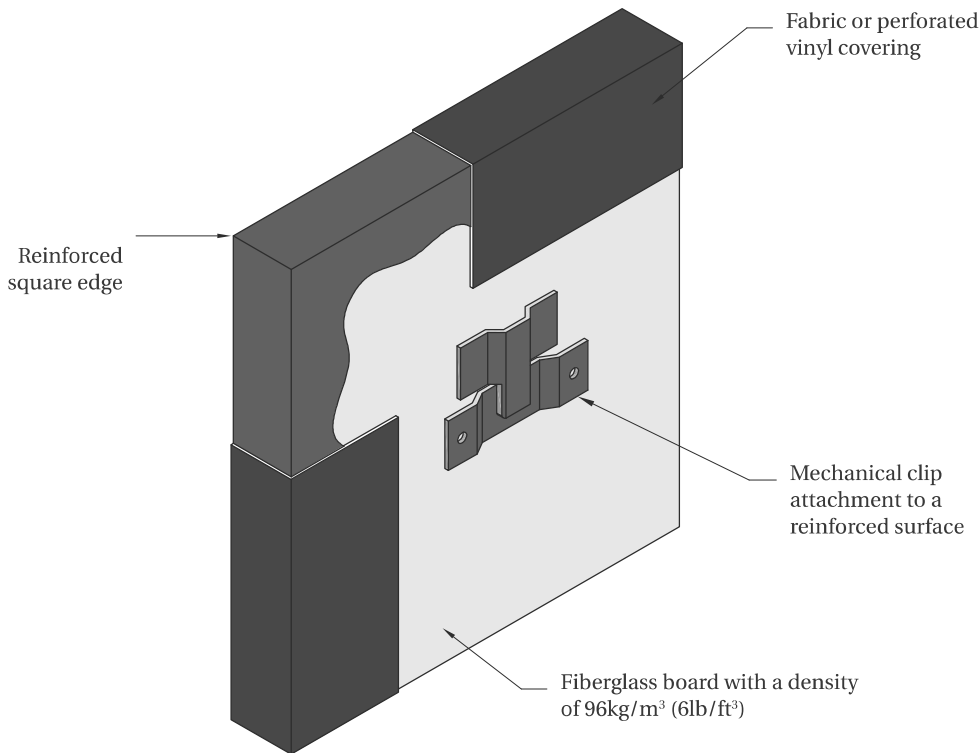



FEATURES

- ▣ Controls sound reverberation
- ▣ Prefabricated panel
- ▣ Semi rigid fiberglass mat, high density, non combustible
- ▣ Vinyl or fabric materials non combustible class A rated
- ▣ Wall or ceiling mounting

NOISE REDUCTION COEFFICIENT (N.R.C.)

- ▣ 0.80 for 25mm (1") panels
- ▣ 1.00 for 51mm (2") panels


PANEL DIMENSIONS

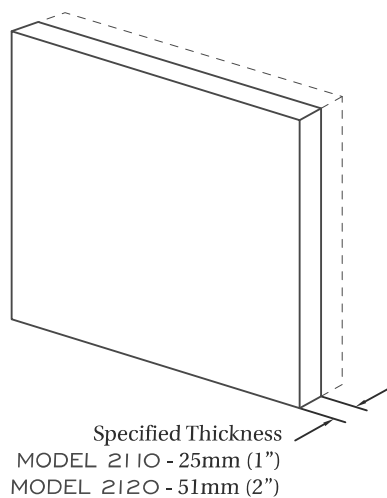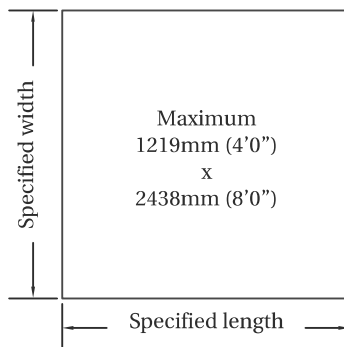

ATTACHMENTS

WALL MOUNTING

Mechanical clip attachments fixed to the panel are used for gypsum, wood or concrete.

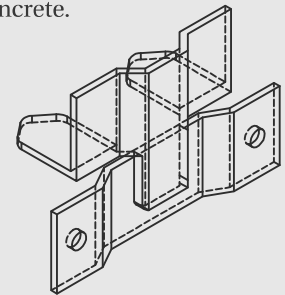

CEILING MOUNTING

Attachment is provided by a 51mm (2") ring covered with identical surface materials and spaced within our specifications.